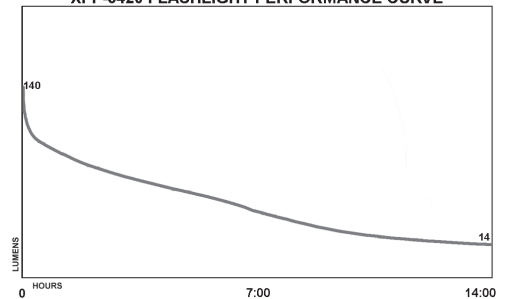


## XPP-5420B

### Intrinsically Safe Permissible Flashlight

<b>MARKET APPLICATIONS</b>	Hazardous work environments, industrial, automotive, law enforcement, fire & rescue
<b>DESCRIPTION</b>	This flashlight is cETLus, ATEX, IECEx, MSHA and INMETRO listed Intrinsically Safe Permissible. It uses as CREE® LED rated at 140 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 180 meters. The single body switch provides momentary or constant-on functionality. Power comes from 3 AA premium batteries (not included).
<b>CASE MATERIAL</b>	Engineered Polymer - Black
<b>DIMENSIONS</b>	Length: 7.0 inches (178 mm) • Head Diameter: 1.8 inches (46 mm) • Handle Diameter: 1.0 x 1.5 inches (25 x 38 mm)
<b>WEIGHT</b>	Weight: 7.3 oz. (207 g) with batteries installed
<b>LENS</b>	Unbreakable polycarbonate with scratch resistant coating
<b>LIGHT SOURCE</b>	Flashlight: CREE® LED Impervious to shock with a 50,000 hour lifetime
<b>LIGHT OUTPUT</b>	140 lumens
<b>ON/OFF</b>	Single Body Switch - Momentary or Constant-on Flashlight
<b>RUN-TIME</b>	10 hours
<b>BATTERY</b>	3 Alkaline AA batteries (not included)
<b>FEATURES</b>	<ul style="list-style-type: none"> <li>• cETLus, ATEX, IECEx, MSHA and INMETRO listed Intrinsically Safe Permissible</li> <li>• CREE® LED technology – 50,000 + hours LED life</li> <li>• Momentary or constant-on flashlight</li> <li>• Sharp focused beam for distance illumination</li> <li>• Engineered polymer housing</li> <li>• Non-slip grip</li> <li>• Single body switch</li> <li>• Waterproof</li> <li>• Impact &amp; chemical resistant</li> <li>• Built-in pocket/belt clip</li> <li>• Includes removable lanyard</li> <li>• Requires 3 AA batteries</li> </ul>

**XPP-5420 FLASHLIGHT PERFORMANCE CURVE**









**WARRANTY**                      Limited Lifetime Warranty

**APPROVALS**



FL 1 STANDARD

 <p><b>140</b> <b>LUMENS</b></p>	 <p><b>14h</b></p>	 <p><b>180m</b></p>
 <p><b>7500cd</b></p>	 <p><b>2m</b></p>	 <p><b>1m</b></p>

Permissible Nightstick 5420 Flashlight

**MSHA** APPROVAL No. 20-A130001-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS:

- 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.
- 2) Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types.
- 3) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.
- 4) The Model Nightstick 5420 must not be opened in areas where permissibility is required.

 ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE		
CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga Ⓢ I M 1 Ex ia op is I Ma Ⓢ II 1 G Ex ia op is IIC T3 Ga	Ex ia op is I Ma Ex ia op is IIC T3 Ga Intertek ITS 13 ATEX27837X IECEx ITS 16.0067X -20°C ≤ Tamb ≤ +40°C 1.5V/Cell AA Alkaline	

<b>Conforms to:</b> ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26	<b>Certified to:</b> CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25
----------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------

Designed in USA, manufactured in China at a ISO-9001 certified Bayco facility.