

3AA

INTRANT™ DUAL-LIGHT™ ANGLE LIGHT



EXCLUSIVE
45°
DOWNWARD FLOODLIGHT

HEAD ROTATES 90°




Head rotates 90° - directing beam exactly where it's needed most



45° downward floodlight lights an 8 foot walking area



Easy-to-use with gloves, the large switches independently control separate LEDs

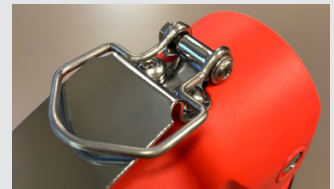

Heavy-duty, clip and V-ring securely holds tight to gear in any situation



AVAILABLE IN MULTIPLE COLORS.



FL1 STANDARD	HIGH	MEDIUM	LOW
	200 LUMENS	110 LUMENS	60 LUMENS
	11h	18h	33h
	401m	250m	187m
	40256cd	15625cd	8750cd
	2m		1m

200 LUMENS

1-800-233-2155 · 1-469-326-9400 · nightstick.com

INTRANT™

DUAL-LIGHT™ ANGLE LIGHT

3AA

ITEM NUMBER/UPC

XPP-5566RX (Red), 0 17398 80629 9
 XPP-5566GX (Green), 0 17398 80628 2

MARKET APPLICATIONS

Hazardous work environments, fire, rescue, industrial and automotive

CERTIFICATIONS

- CE, cULus, Atex, IECEx, NFPA

CASE MATERIAL

- Glass filled nylon polymer

LUMENS/RUNTIME

FLASHLIGHT

- HIGH: 200L, 11 hrs. runtime
- MEDIUM: 110L, 18 hrs. runtime
- LOW: 60L, 33 hrs. runtime
- STROBE

FLOODLIGHT

- HIGH: 100L, 11 hrs. runtime
- MEDIUM: 40L, 18 hrs. runtime
- SURVIVAL: 20L, 33 hrs. runtime

DUAL-LIGHT

- 205L, 11 hrs. runtime

CANDELA

FLASHLIGHT

- HIGH: 40,256
- MEDIUM: 15,625
- LOW: 8,750

BEAM DISTANCE

FLASHLIGHT

- HIGH: 401m
- MEDIUM: 250m
- LOW: 187m

WATER RATING

- IP-67 (dustproof and waterproof)

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 6.6 in (168mm)
- WIDTH: 2.6 in (66mm)
- DEPTH: 2.6 in (66mm)
- BEZEL DIAMETER: 2.1 in (53mm)
- WEIGHT: 11.1 oz (315g)(with batteries)

BATTERY

- 3AA batteries (included)


WARRANTY

- Limited Lifetime Warranty

WHAT'S INCLUDED

- Angle light
- AA battery carrier
- 3AA batteries
- Instruction manual

FL 1 STANDARD	HIGH	MEDIUM	LOW
	200 LUMENS	110 LUMENS	60 LUMENS
	11h	18h	33h
	401m	250m	187m
	40256cd	15625cd	8750cd
	2m		
	1m		

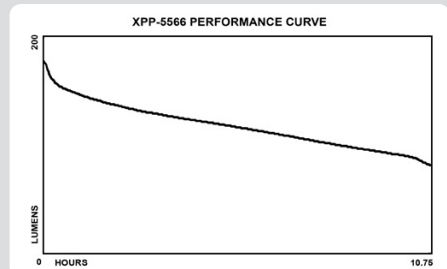

Bayco Products, Inc. XPP-5566
 640 S. Sanden Blvd., Wylie, TX 75098

Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS
 For use with Bayco Li-Ion Battery Pack 5568-BATT or
 5566-CARRIER with 3 AA Energizer Type EN91 or E91
 batteries only

UL LISTED
 E 114304
 ID 4003544
 ELECTRICAL SAFETY
 INTRINSICALLY SAFE
 SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3
 CLASS II & III DIV1 GRPS E-G T135°C
 CLASS I ZONE 0 AEx ia IIC T3 Ga
 Ⓜ I M1 Ex ia op is I Ma
 Ⓜ II 1 G Ex ia op is IIC T3 Ga

Ex ia op is I Ma
 Ex ia op is IIC T3 Ga
 DEMKO 17 ATEX 1927
 IECEx UL 17.0082
 -20°C ≤ Tamb ≤ +40°C
 1.5V/Cell Alkaline
 3.7V/Cell Li-Ion
 IP-67
 Um: 10V

CE 0359
 Control Drawing: 5568-CERT-DWG-1-03



AVAILABLE IN MULTIPLE COLORS.

© 2018 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit nightstick.com for product updates. XPP-5566-18

